

Featuring GIO Calacatta 24x24

calacatta

GIO
ARCHITECTURAL TILE + STONE

calacatta

The classic, nuanced look and lustrous finish of premium calacatta marble becomes a modern marvel when authentically interpreted in porcelain tile

INKJET RECTIFIED GLAZED PORCELAIN STONEWARE
AVAILABLE IN SEMI-POLISHED LUSTER FINISH


GOLD



GICNX2424LUS
24" x 24" Rectified and Luster Finish Field Tile



GICNX2448LUS
24" x 48" Rectified and Luster Finish Field Tile

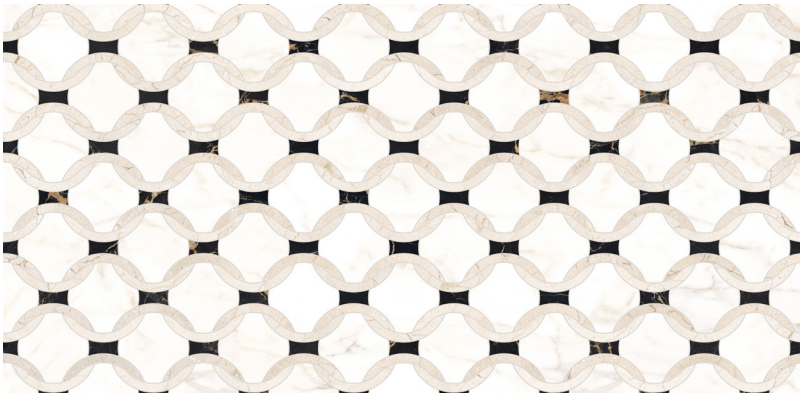

GICNX2448LUSDC
24" x 48" Luster Finish Honed Decor

GICNX1224LUS
12" x 24" Rectified and Luster Finish Field Tile




GICNXSTMOSLUS
1" x 3" Stacked Mosaic



GICNX324BNLUS
3" x 24" Bullnose



GICNXMOSLUS
1" x 3" Herringbone Mosaic



GICNX312LUS
3" x 12" Rectified and Luster Finish Field Tile

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24"x 24" Rectified Field Tile	3	11.63	56	40	465.20	2240
24"x 48" Rectified Field Tile	2	15.50	80	21	325.50	1700
12"x 24" Rectified Field Tile	6	11.62	53.60	40	465.20	2240
3"x 12" Rectified Field Tile	26	6.29	28.50	60	377.52	1705
24"x 48" Decor	2	15.50	63.50	36	558	2286
1"x 3" Herringbone Mosaic	-	-	-	-	-	-
1"x 3" Stacked Mosaic	-	-	-	-	-	-

TECHNICAL SPECIFICATIONS

DESCRIPTION	RESULT	TEST METHOD (STANDARD)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.5%	C373 Test
PEI	5	C1027 Test
C.O.F. (Dynamic)	0.42	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Breaking Strength	250 lbs.	ASTMC648
Thickness	11 mm	Factory Provided

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•