


Featuring GIO Verde_Alpi, 12" x 24" Matte Rectified Field Tile

GIO
ARCHITECTURAL TILE + STONE


verde_alpi

vivid white veining mixed with deep dark green coloration,
a porcelain perfect interpretation of italian marble marvel


INKJET RECTIFIED POLISHED & MATTE, FLOOR & WALL GLAZED PORCELAIN STONEWARE

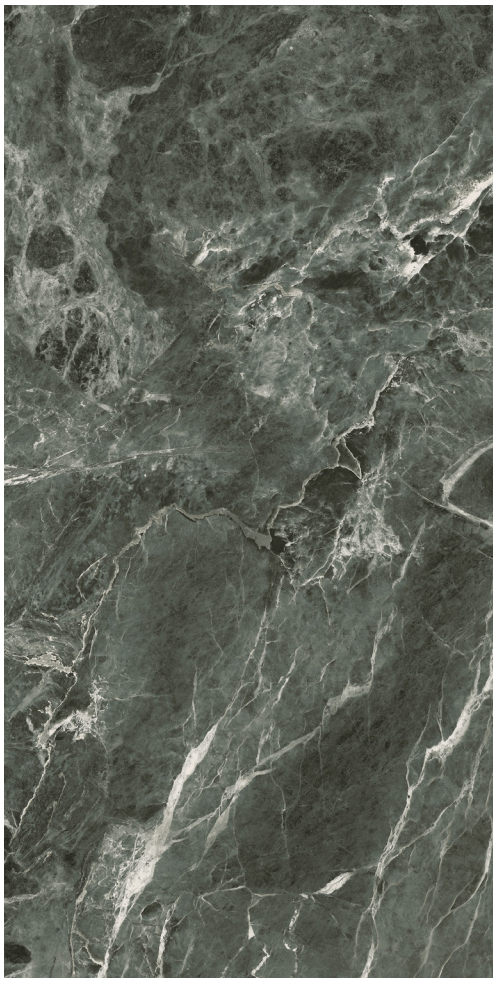

GIVERAL2448
24" x 48" Matte Rectified Field Tile
GIVERAL2448PO
24" x 48" Polished & Rectified Field Tile

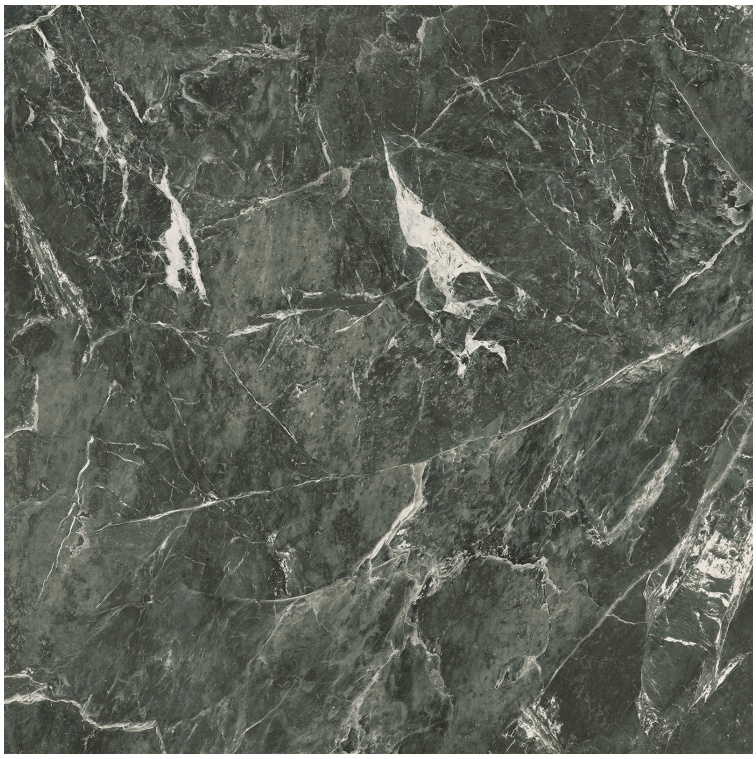


GIVERAL3636
36" x 36" Matte Rectified Field Tile
GIVERAL3636PO
36" x 36" Polished & Rectified Field Tile



GVERALMOS
2" x 2" Matte Mosaic



GVERAL424BN
4" x 24" Matte Rectified Bullnose
GIVERAL424BNPO
4" x 24" Polished & Rectified Bullnose

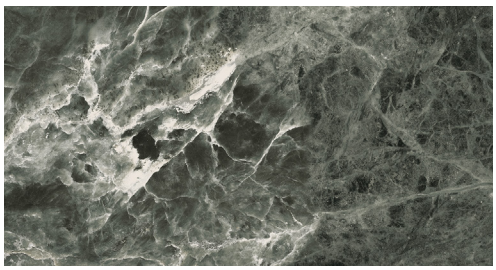

GIVERAL1224
12" x 24" Matte Rectified Field Tile
GIVERAL1224PO
12" x 24" Polished & Rectified Field Tile

PACKAGING


NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x48 Rectified Field Tile	2	15.39	64.98	40	615.70	2599
36x36 Rectified Field Tile	2	17.40	78.20	30	522	2346
12x24 Rectified Field Tile	8	15.62	58.20	32	499.84	1862.40
2x2 Mosaic	5	4.84	17.64	-	-	-
4x24 Bullnose	16	-	39.46	-	-	-

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.05%	ISO 10545-3
PEI	5	C1027 Test
C.O.F. (Dynamic)	Matte - 0.42	ANSI 137.1
C.O.F. (Dynamic)	Polished - NOT COMPLIANT	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•