

Featuring GIO Bardiglio, Bianco 24x48 Polished & Rectified Field Tile


bardiglio

bardiglio

Big design happens in the little details, as evidenced in this striking marble look with its lean, parallel veining. Offered in bold sizes and two shades of gray interpreted in durable porcelain

INKJET RECTIFIED POLISHED & MATTE, FLOOR & WALL GLAZED PORCELAIN STONEWARE

GREIGE

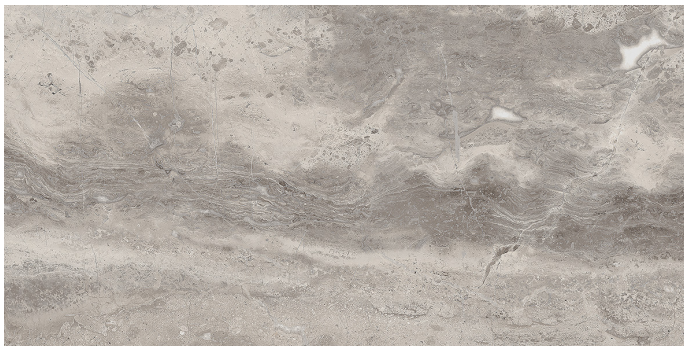

GIBAR2448GRM
24" x 48" Rectified
Matte Field Tile

GIBAR2448GRP
24" x 48" Polished &
Rectified Field Tile



GIBAR1224GRM
12" x 24" Rectified
Matte Field Tile

GIBAR1224GRP
12" x 24" Polished &
Rectified Field Tile



GIBAR424BNGRM
4" x 24"
Matte Bullnose

GIBAR424BNGRP
4" x 24"
Polished Bullnose



GIBAR612CBGRM
6" x 12"
Matte Cove Base



GIBARMOSGR
2" x 2" Matte Mosaic

BIANCO



GIBAR2448WTM
24" x 48" Rectified
Matte Field Tile

GIBAR2448WTP
24" x 48" Polished &
Rectified Field Tile



GIBAR1224WTM
12" x 24" Rectified
Matte Field Tile

GIBAR1224WTP
12" x 24" Polished &
Rectified Field Tile



GIBAR424BNWTM
4" x 24"
Matte Bullnose

GIBAR424BNWTP
4" x 24"
Polished Bullnose



GIBAR612CBWTM
6" x 12"
Matte Cove Base



GIBARMOSWT
2" x 2" Matte Mosaic

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x48 Rectified Field Tile	4	31.66	113	18	570	2220
12x24 Rectified Field Tile	8	15.75	56	32	504.03	1831
4x24 Bullnose	16	-	48	-	-	-
2x2 Mosaic	5	4.90	20	-	-	-
6x12 Cove Base	8	-	14	-	-	-

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.5%	ISO 10545-3
PEI	4	C1027 Test
C.O.F. (Dynamic) Matte	0.42	ANSI 137.1
C.O.F. (Dynamic) Polished	0.24 (Not Compliant)	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	8 mm	Factory Provided

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•