

Featuring GIO.Brick Filo' Blue Bright Wall Tile

GIO
ARCHITECTURAL TILE + STONE

brick_filo


a glazed & wirebrushed brick interpretation with a dynamic duo of finishes, complete with catchy clay character and organic sleek style

GLAZED PORCELAIN STONEWARE AVAILABLE IN GLOSSY & FLUTED FINISHES

BIANCO




GIBF38BI
3" x 8" Bright Wall Tile






GIBF38BIDC
3" x 8" Bright Deco Tile




BLUE




GIBF38BL
3" x 8" Bright Wall Tile

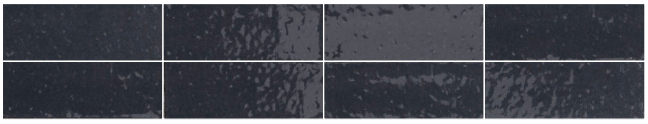




GIBF38BLDC
3" x 8" Bright Deco Tile

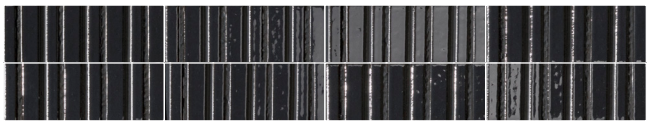

BASILICA GREY




GIBF38GR
3" x 8" Bright Wall Tile

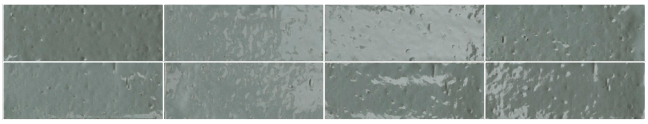




GIBF38GRDC
3" x 8" Bright Deco Tile

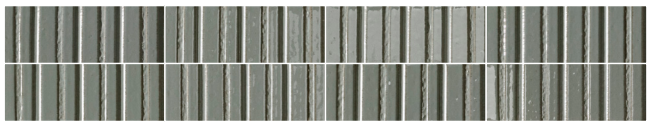

PUTTY




GIBF38PU
3" x 8" Bright Wall Tile

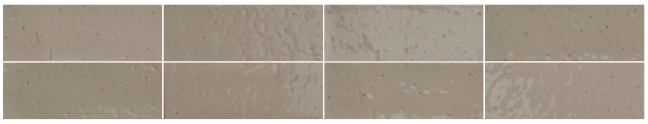




GIBF38PUDC
3" x 8" Bright Deco Tile

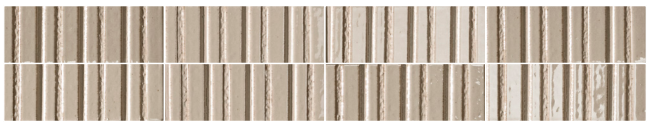

SAGE




GIBF38SA
3" x 8" Bright Wall Tile

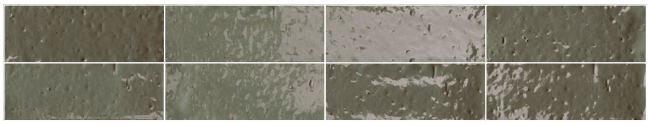





GIBF38SADC
3" x 8" Bright Deco Tile

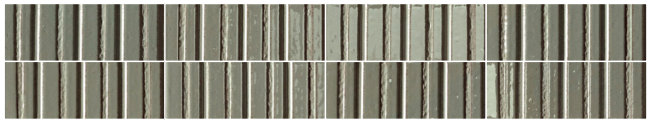

TURQUOISE




GIBF38TU
3" x 8" Bright Wall Tile

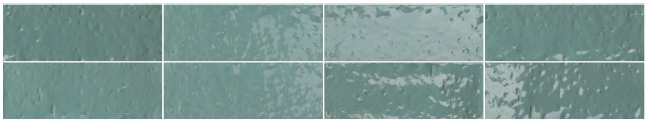



GIBF38TUDC
3" x 8" Bright Deco Tile

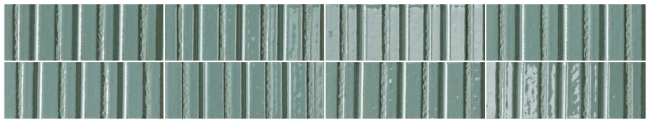


PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
3" x 8" Wall Tile	56	9.04	34	76	687.17	2559
3" x 8" Deco Tile	52	8.40	35	60	503.76	2196

SHADE VARIATION AND APPLICATIONS

V2



MODERATE VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor			
Wall	•	•	•
Countertop			

TECHNICAL SPECIFICATIONS

DESCRIPTION	RESULT	TEST METHOD (STANDARD)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.5%	ISO 10545-3
PEI	Wall Only	C1027 Test
C.O.F. (Dynamic)	Not Compliant	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm (Deco 11.5 mm)	Factory Provided