

Featuring GIO Ceppo_Prima, Warm Grey 24" x 48" Rectified Field Tile


GIO
ARCHITECTURAL TILE + STONE

ceppo_prima


fine grained fragments in porcelain personality married with a mineral matrix of iconic Italian chic ceppo stone

INKJET RECTIFIED FLOOR & WALL GLAZED PORCELAIN STONEWARE


WHITE

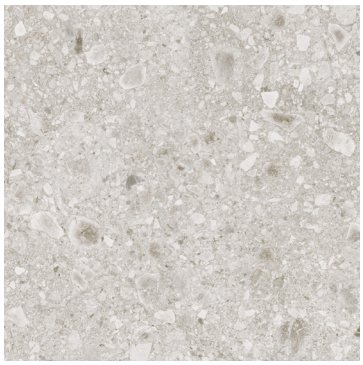

GICEP3636WH
36" x 36" Rectified Field Tile



GICEPMOSWH
2.5" x 2.5" Mosaic

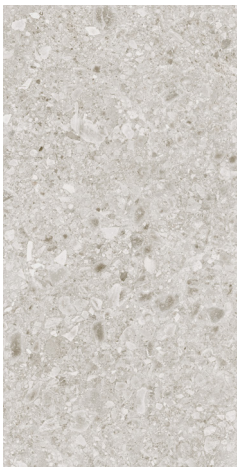


GICEP2448WH
24" x 48" Rectified Field Tile




GICEP424BNWH
4" x 24" Bullnose

SMOKEY GREY

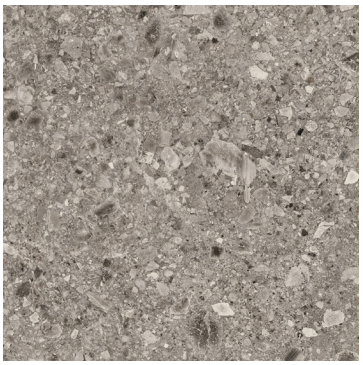

GICEP3636SM
36" x 36" Rectified Field Tile



GICEPMOSSM
2.5" x 2.5" Mosaic




GICEP2448SM
24" x 48" Rectified Field Tile




GICEP424BNSM
4" x 24" Bullnose


WARM GREY

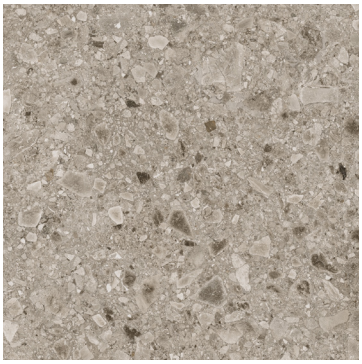

GICEP3636WGR
36" x 36" Rectified Field Tile



GICEPMOSWGR
2.5" x 2.5" Mosaic

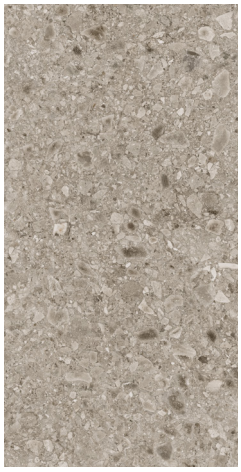


GICEP2448WGR
24" x 48" Rectified Field Tile




GICEP424BNWGR
4" x 24" Bullnose


LIGHT GREY

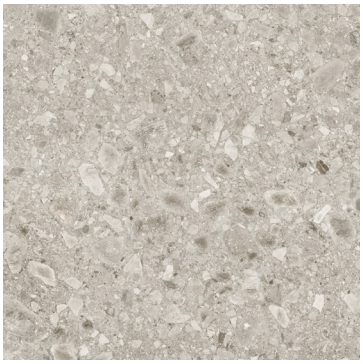

GICEP3636LGR
36" x 36" Rectified Field Tile



GICEPMOSLGR
2.5" x 2.5" Mosaic

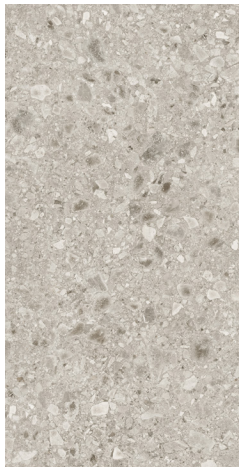

GICEP2448LGR
24" x 48" Rectified Field Tile



GICEP424BLGR
4" x 24" Bullnose

TECHNICAL SPECIFICATIONS


Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.05%	ISO 10545-3
PEI	5	C1027 Test
C.O.F. (Dynamic)	0.42	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x48 Rectified Field Tile	2	15.50	64	36	448	2304
36x36 Rectified Field Tile	2	17.40	71	25	435	1775
2.5x2.5 Mosaic	5	4.84	17.64	-	-	-
4x24 Bullnose	16	9.82	34	-	-	-

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•