

Featuring GIO Dorato, Silver Grey 12x24 (Wall) and Loft, Taupe 8x48 (Floor)

dorato


GIO
ARCHITECTURAL TILE + STONE

dorato


Travertine's luxe look in all its vein-cut, sophisticated glory – interpreted in durable porcelain, offered in undulating neutrals and modern sizes – a timeless style catches a modern wave

INKJET FLOOR & WALL GLAZED PORCELAIN STONEWARE

BEIGE

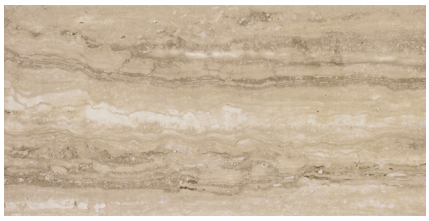

GIDO1224BE
12" x 24" Field Tile



GIDOMOSBE
12" x 12" Mesh Mounted Mosaic




GIDO424BE
4" x 24" Bullnose

IVORY



GIDO1224IV
12" x 24" Field Tile



GIDOMOSIV
12" x 12" Mesh Mounted Mosaic



GIDO424IV
4" x 24" Bullnose

SILVER GREY



GIDO1224SGR
12" x 24" Field Tile




GIDOMOSSGR
12" x 12" Mesh Mounted Mosaic



GIDO424SGR
4" x 24" Bullnose

WARM GREY

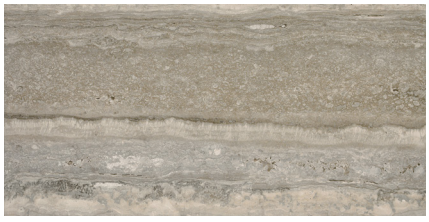

GIDO1224WGR
12" x 24" Field Tile



GIDOMOSWGR
12" x 12" Mesh Mounted Mosaic



GIDO424WGR
4" x 24" Bullnose

PACKAGING


NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
12" x 24" Field Tile	8	15.82	66.58	32	506.32	2130.56
4" x 24" Bullnose	16	-	43.87	60	–	2632.20
12" x 12" Mesh Mounted Mosaic	4	3.87	16.53	81	313.87	1338.93

TECHNICAL SPECIFICATIONS

DESCRIPTION	RESULT	TEST METHOD (STANDARD)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.05%	C373 Test
PEI	4	C1027 Test
C.O.F. (Dynamic)	0.42	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Breaking Strength	250 lbs.	ASTMC648
Thickness	9 mm	Factory Provided

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•

G2 GREEN SQUARED
Certified by UL Environment