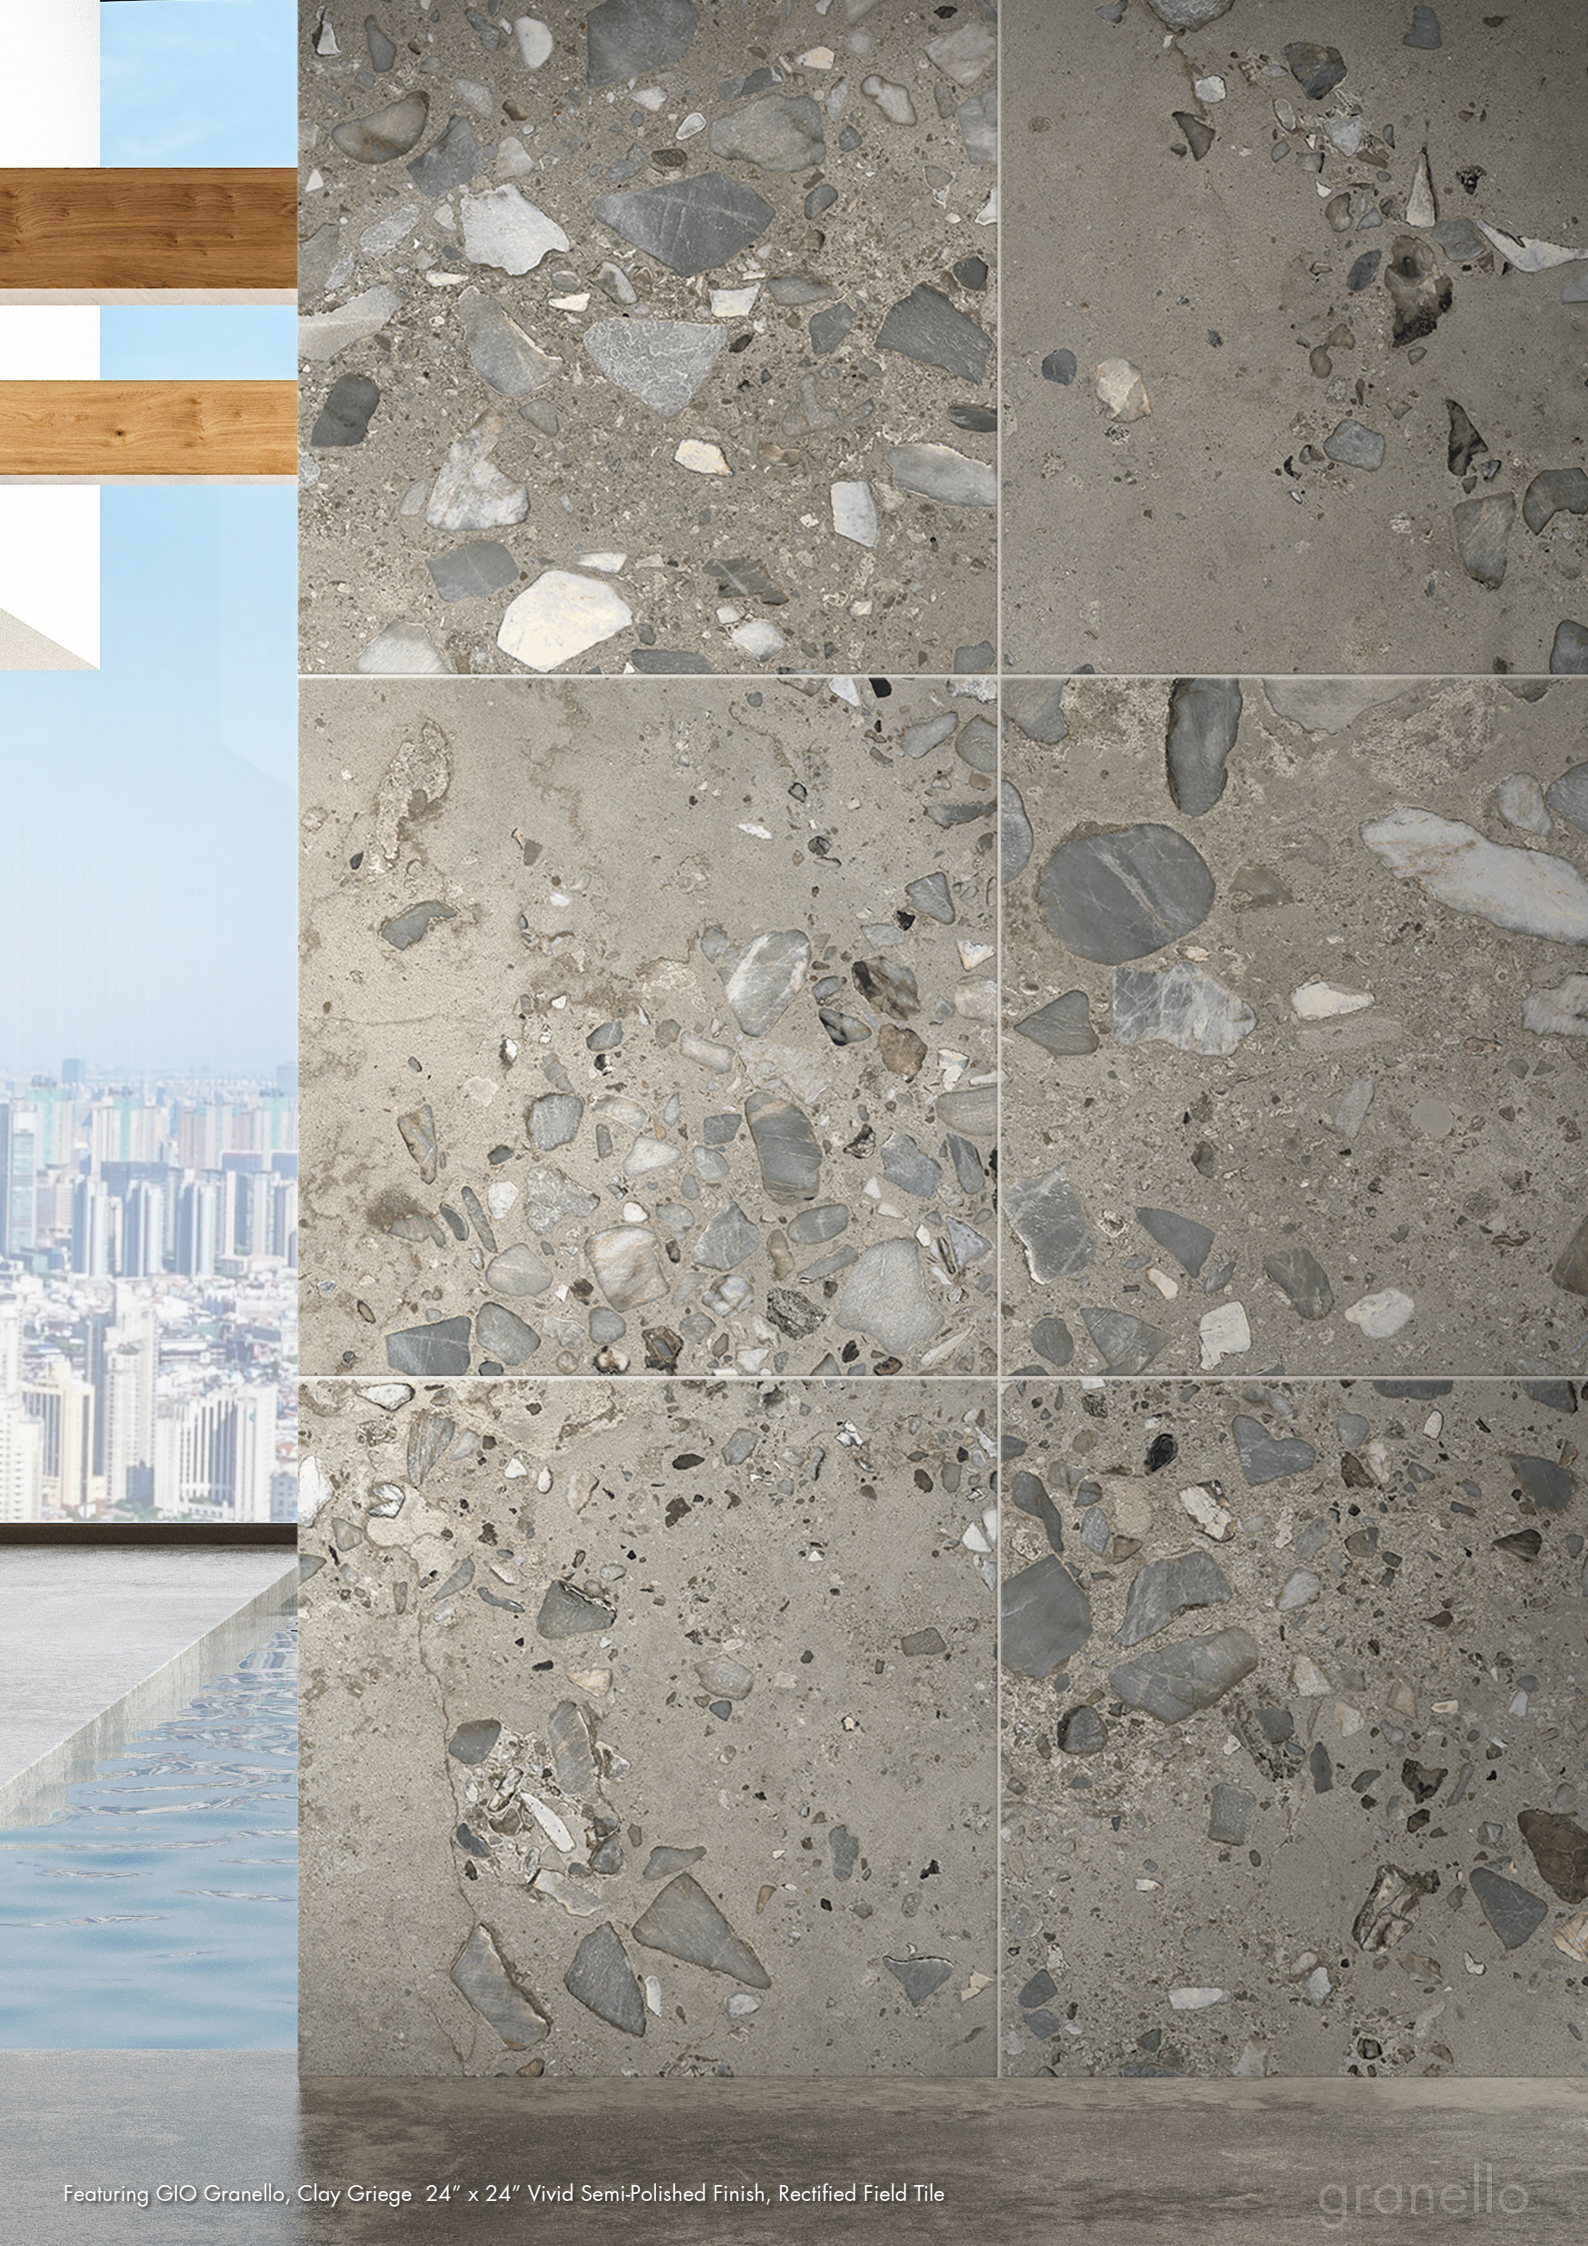


Featuring GIO Granello, Clay Griege 24" x 24" Vivid Semi-Polished Finish, Rectified Field Tile

granello

GIO
ARCHITECTURAL TILE + STONE

granello


sophisticated surfaces in a lush limestone inspired offering with two tremendous tile textures, flawless finishes in natural or semi-polished porcelain

INKJET RECTIFIED NATURAL & SEMI-POLISHED FLOOR & WALL GLAZED PORCELAIN STONEWARE

ANTHRACITE



GIGNL2448ANT
24" x 48" Natural Finish,
Rectified Field Tile




GIGNL2424ANTSP
24" x 24" Vivid Semi-Polished
Finish, Rectified Field Tile

BEIGE



GIGNL2448BEI
24" x 48" Natural Finish,
Rectified Field Tile




GIGNL2424BEISP
24" x 24" Vivid Semi-Polished
Finish, Rectified Field Tile

AVORIO



GIGNL2448IVO
24" x 48" Natural Finish,
Rectified Field Tile



GIGNL2424IVOSP
24" x 24" Vivid Semi-Polished
Finish, Rectified Field Tile

CLAY GREIGE



GIGNL2448ARG
24" x 48" Natural Finish,
Rectified Field Tile




GIGNL2424ARGSP
24" x 24" Vivid Semi-Polished
Finish, Rectified Field Tile

WARM GREY



GIGNL2448GRI
24" x 48" Natural Finish,
Rectified Field Tile




GIGNL2424GRISP
24" x 24" Vivid Semi-Polished
Finish, Rectified Field Tile

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x48 Rectified Field Tile	2	15.50	63	36	558	2268
24x24 Rectified Field Tile	4	15.72	66	32	503.04	2112

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.05%	ISO 10545-3
PEI	5	C1027 Test
C.O.F. (Dynamic)	Natural Finish - 0.42	ANSI 137.1
C.O.F. (Dynamic)	Semi-Polished - NOT COMPLIANT	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided