

Featuring GIO Luce, Cream 24" x 48" Rectified Field Tile
and 24" x 48" Rectified 3D Decoria

GIO
ARCHITECTURAL TILE + STONE

luce

limitless limestone inspired shapes & sizes sculpted into a creative yet contemporary porcelain palette

INKJET FLOOR & WALL GLAZED PORCELAIN STONEWARE AVAILABLE IN HONED & 3D FINISHES

IVORY



GILUC2448IVY
24" x 48"
Rectified Field Tile



GILUC1224IVY
12" x 24"
Rectified Field Tile



GILUCCHEVIVY
3" x 18" Chevron



GILUC2448IVYD
24" x 48"
Rectified 3D Decoria

GREY




GILUC2448GRY
24" x 48"
Rectified Field Tile



GILUC1224GRY
12" x 24"
Rectified Field Tile



GILUCCHEVGRY
3" x 18" Chevron

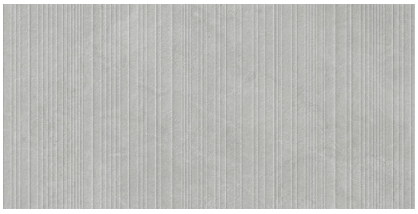

GILUC2448GRYD
24" x 48"
Rectified 3D Decoria

WHITE

GILUC2448WHT
24" x 48"
Rectified Field Tile

GILUC1224WHT
12" x 24"
Rectified Field Tile

GILUCCHEVWHT
3" x 18" Chevron



GILUC2448WHTD
24" x 48"
Rectified 3D Decoria

CREAM

GILUC2448CRE
24" x 48"
Rectified Field Tile

GILUC1224CRE
12" x 24"
Rectified Field Tile

GILUCCHEVCRE
3" x 18" Chevron



GILUC2448ICRE
24" x 48"
Rectified 3D Decoria

PACKAGING


NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x48 Rectified Field Tile	2	15.50	61.28	35	542.50	2144.80
24x48 Rectified 3D Decoria	2	15.50	61.28	35	542.50	2144.80
12x24 Rectified Field Tile	7	13.56	56.42	40	542.40	2256.80
3x18 Chevron	26	9.44	39.52	56	528.64	2213.12

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.5%	ISO 10545-3
PEI	5	C1027 Test
C.O.F. (Dynamic)	0.42	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided

SHADE VARIATION AND APPLICATIONS

V2



MODERATE VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•