

Featuring GIO Marmi_Revival, Nero and Oro 12″ x 12″ Rectified Field Tile

marmi_revival

GIO
ARCHITECTURAL TILE + STONE

marmi_revival

a square statement of style in a timeless elegant expression of marble,
perfect for porcelain patterns or solid sophistication

INKJET RECTIFIED FLOOR & WALL GLAZED PORCELAIN STONEWARE

BIANCO







GIMRV1212BIA
12″ x 12″ Rectified Field Tile

GIMRV2424BIA
24″ x 24″ Rectified Field Tile

CENERE

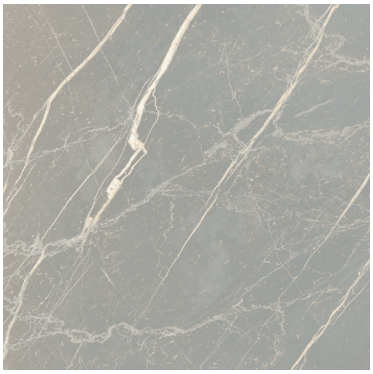





GIMRV1212CEN
12″ x 12″ Rectified Field Tile

GIMRV2424CEN
24″ x 24″ Rectified Field Tile

NERO

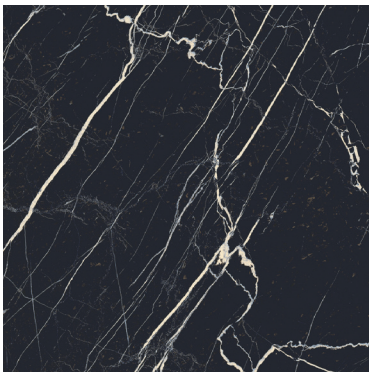



GIMRV1212NER
12″ x 12″ Rectified Field Tile

GIMRV2424NER
24″ x 24″ Rectified Field Tile

ORO






GIMRV1212ORO
12″ x 12″ Rectified Field Tile

GIMRV2424ORO
24″ x 24″ Rectified Field Tile

BLUE



GIMRV1212BLU
12″ x 12″ Rectified Field Tile

ROSSO




GIMRV1212ROS
12″ x 12″ Rectified Field Tile

CREMA



GIMRV1212CRE
12″ x 12″ Rectified Field Tile

VERDI




GIMRV1212VER
12″ x 12″ Rectified Field Tile

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x24 Rectified Field Tile	4	15.50	62.84	30	465	1885.20
12x12 Rectified Field Tile	14	13.56	55.02	60	813.60	3301.20

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.05%	ISO 10545-3
PEI	4	C1027 Test
C.O.F. (Dynamic)	0.42	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided