

Featuring GIO Marmi_Satin, Bluette 24x24 Rectified and Brushed Field Tile

marmi_satin


GIO
ARCHITECTURAL TILE + STONE

marmi_satin


A collection of magnificent marbles matched with a brushed satin surface, a touch of spectacular stone for any setting

INKJET RECTIFIED FLOOR & WALL GLAZED PORCELAIN STONEWARE - BRUSHED FINISH

BLUETTE

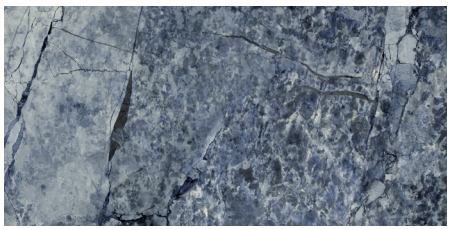


GIMRS2448BLU
24" x 48" Rectified and Brushed Field Tile



GIMRS2424BLU
24" x 24" Rectified and Brushed Field Tile




GIMRS848BLU
8" x 48" Rectified and Brushed Field Tile



GIMRSMOSBLU
1" x 3" Rectified and Brushed Stacked Mosaic

PALLADIUM

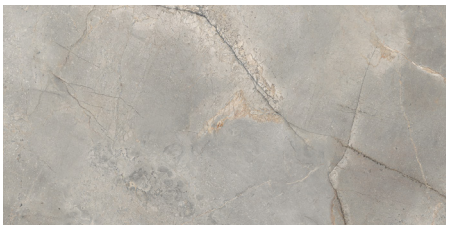

GIMRS2448PAL
24" x 48" Rectified and Brushed Field Tile



GIMRS2424PAL
24" x 24" Rectified and Brushed Field Tile



GIMRS848PAL
8" x 48" Rectified and Brushed Field Tile



GIMRSMOSPAL
1" x 3" Rectified and Brushed Stacked Mosaic

TOSCANA GREY




GIMRS2448TOS
24" x 48" Rectified and Brushed Field Tile



GIMRS2424TOS
24" x 24" Rectified and Brushed Field Tile



GIMRS848TOS
8" x 48" Rectified and Brushed Field Tile



GIMRSMOSTOS
1" x 3" Rectified and Brushed Stacked Mosaic

CORCHIA WHITE




GIMRS2448COR
24" x 48" Rectified and Brushed Field Tile



GIMRS2424COR
24" x 24" Rectified and Brushed Field Tile



GIMRS848COR
8" x 48" Rectified and Brushed Field Tile



GIMRSMOSCOR
1" x 3" Rectified and Brushed Stacked Mosaic


PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x48 Rectified Field Tile	2	15.50	68.34	35	542.50	2391.90
24x24 Rectified Field Tile	3	11.62	49.59	40	464.80	1983.60
8x48 Rectified Field Tile	-	-	-	-	-	-
1x3 Stacked Mosaic	10	10	50	-	-	-

100 sq. ft. minimum

SHADE VARIATION AND APPLICATIONS

V2



MODERATE VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.5%	ISO 10545-3
PEI	4	C1027 Test
C.O.F. (Dynamic)	0.42	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided