


Featuring GIO Statuarietto Bianco, 30 x 30 Polished & Rectified

statuarietto bianco

statuarietto bianco

Experience bold sizes, veining & marble fashion in a symphony of statuary sizes for any porcelain project possibility!

INKJET RECTIFIED FLOOR & WALL GLAZED PORCELAIN STONEWARE
ALSO AVAILABLE IN PORCELAIN PANELS

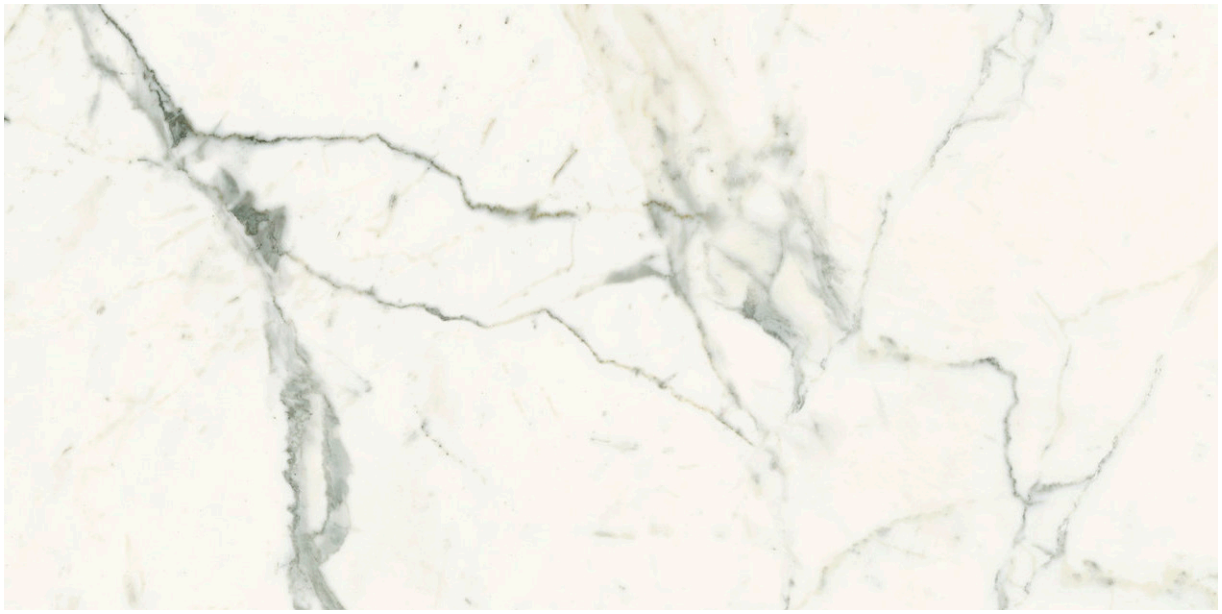

GISTU60120STBH
60" x 120" Honed & Rectified Porcelain Panel

GISTU60120STBP
60" x 120" Polished & Rectified Porcelain Panel




GISTU3030STBH
30" x 30" Honed & Rectified Field Tile

GISTU3030STBP
30" x 30" Polished & Rectified Field Tile



GISTU1224STBH
12" x 24" Honed & Rectified Field Tile

GISTU1224STBP
12" x 24" Polished & Rectified Field Tile



GISTU22MOSSTBH
2" x 2" Honed Mosaic



GISTU312BNSTBH
3" x 12" Honed Bullnose

GISTU312BNSTBP
3" x 12" Polished Bullnose



GISTU612CBSTBH
6" x 12" Honed Cove Base

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
60 x 120 Rectified Porcelain Panel (A-Frame needed for shipment)	1	48.34	139.50	50	2421.90	7456
30 x 30 Rectified Field Tile	3	18.16	69	36	653.90	2463
12x 24 Rectified Field Tile	8	15.75	56	32	504.03	1790
2x2 Mosaic	5	4.90	23	-	-	-
3x12 Bullnose	15	-	15	-	-	-
6x12 Cove Base	8	-	16	-	-	-

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.5%	ISO 10545-3
PEI	4	C1027 Test
C.O.F. (Dynamic)	Honed - 0.42	ANSI 137.1
C.O.F. (Dynamic)	Polished - Not Compliant	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	8 mm (6mm - 60 x 120)	Factory Provided

GREEN SQUARED
Certified by UL Environment