

Featuring GIO Bahia 24" x 48" Matte Rectified Field Tile


bahia

GIO
ARCHITECTURAL TILE + STONE


bahia

experience a porcelain portrayal of gorgeous blue granite, an exotic luxury with vivid veining in this version of polished & matte superior stoneware

INKJET RECTIFIED POLISHED AND MATTE FLOOR & WALL GLAZED PORCELAIN STONEWARE

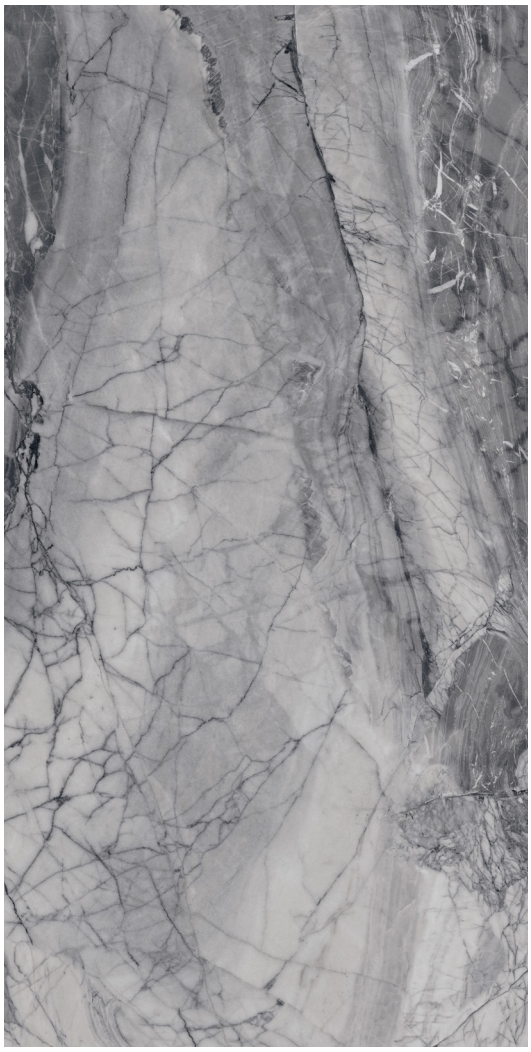


GIBAHI2448
24"x 48" Matte Rectified Field Tile
GIBAHI2448PO
24"x 48" Polished & Rectified Field Tile

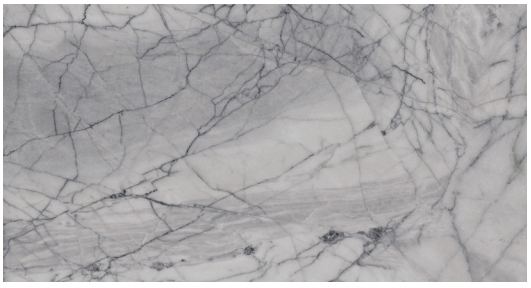

GIBAHI1224
12"x 24" Matte Rectified Field Tile
GIBAHI1224PO
12"x 24" Polished & Rectified Field Tile



GIBAHI3636
36"x 36" Matte Rectified Field Tile
GIBAHI3636PO
36"x 36" Polished & Rectified Field Tile



GIBAHIMOS
2"x 2" Matte Rectified Mosaic




GIBAHI424BN
4"x 24" Matte Bullnose
GIBAHI424BNPO
4"x 24" Polished Bullnose

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x48 Rectified Field Tile	2	15.39	64.98	40	615.70	2599
36x36 Rectified Field Tile	2	17.40	78.20	30	522	2346
12x24 Rectified Field Tile	8	15.62	58.20	32	499.84	1862.40
2x2 Mosaic	5	4.84	17.64	-	-	-
4x24 Bullnose	16	-	39.46	-	-	-

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.05%	ISO 10545-3
PEI	4	C1027 Test
C.O.F. (Dynamic)	0.42 (Matte)	ANSI 137.1
C.O.F. (Dynamic)	Not Compliant (polished)	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided