

Featuring GIO Ceppo Reale, Grigio 24" x 24" Rectified Field Tile
and 5" x 48" Scored & Rectified Decoria Field Tile


Ceppo Reale

ceppo_reale


fashionable fragments in a mineral matrix create this posh & peerless porcelain package of stylish sizes and shades

INKJET RECTIFIED FLOOR & WALL GLAZED PORCELAIN STONEWARE


BIANCO

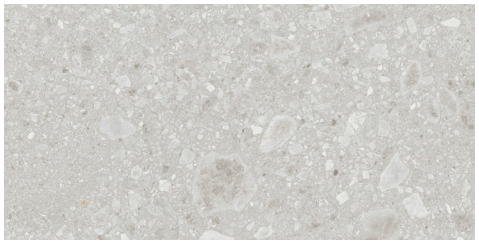

GICPC2448BIA
24" x 48" Rectified Field Tile




GICPC2424BIA
24" x 24" Rectified Field Tile




GICPC548BIA
5" x 48" Scored & Rectified Decoria Field Tile

GRIGIO

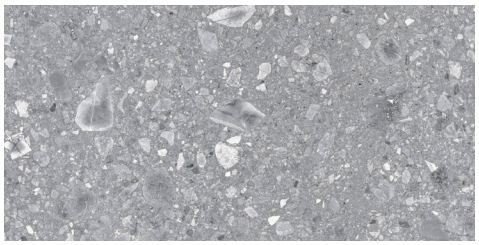

GICPC2448GR
24" x 48" Rectified Field Tile




GICPC2424GR
24" x 24" Rectified Field Tile



GICPC548GR
5" x 48" Scored & Rectified Decoria Field Tile

BEIGE

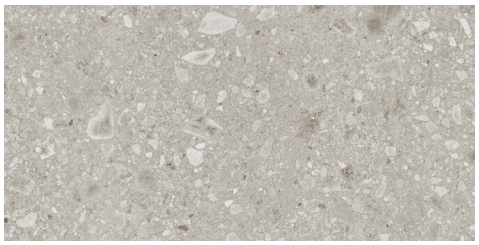

GICPC2424BGE
24" x 48" Rectified Field Tile




GICPC2424BGE
24" x 24" Rectified Field Tile




GICPC548BGE
5" x 48" Scored & Rectified Decoria Field Tile

ANTHRACITE

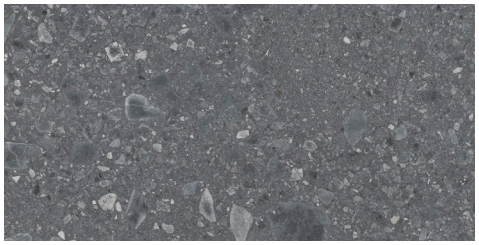

GICPC2448AN
24" x 48" Rectified Field Tile



GICPC2424AN
24" x 24" Rectified Field Tile




GICPC548AN
5" x 48" Scored & Rectified Decoria Field Tile

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
24x24 Rectified Field Tile	3	11.62	49.65	40	464.80	1986
24x48 Rectified Field Tile	2	15.49	33.58	36	557.64	1208.88
5x48 Rectified Listello Tile	4	7	66.12	30	210	1983.60

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.5%	ISO 10545-3
PEI	4	C1027 Test
C.O.F. (Dynamic)	0.42	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided