

Featuring GIO Cement+, Graphite 12x24

cement+

GIO
ARCHITECTURAL TILE + STONE

cement+

The look of concrete goes modern with sophisticated detailing and versatile sizes

INKJET COLORED BODY RECTIFIED FLOOR & WALL GLAZED PORCELAIN STONEWARE


COBALT



GICM1224BLU
12" x 24" Rectified Field Tile



GICM324BNBLU
3" x 24" Bullnose

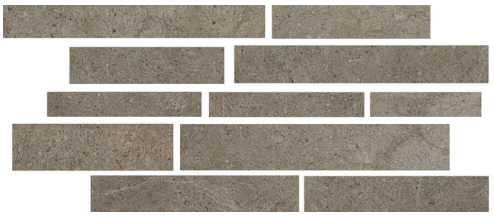


GICM1224MOSBLU
12" x 24" Linear Mosaic

BEIGE



GICM1224BG
12" x 24" Rectified Field Tile



GICM324BNBG
3" x 24" Bullnose




GICM1224MOSBG
12" x 24" Linear Mosaic

GREY



GICM1224GR
12" x 24" Rectified Field Tile



GICM324BNGR
3" x 24" Bullnose



GICM1224MOSGR
12" x 24" Linear Mosaic

GRAPHITE



GICM1224MA
12" x 24" Rectified Field Tile



GICM324BNMA
3" x 24" Bullnose



GICM1224MOSMA
12" x 24" Linear Mosaic

PACKAGING						
NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
12" x 24" Rectified Field Tile	8	15.75	57.18	32	504.03	1,830.70
12" x 24" Linear Mosaic	4	—	—	—	—	—
3" x 24" Bullnose	16	—	—	—	—	—

SHADE VARIATION AND APPLICATIONS				
V3		RESIDENTIAL	COMMERCIAL	INDUSTRIAL
HEAVY VARIATION	Floor	•	•	•
	Wall	•	•	•
	Countertop	•	•	•

TECHNICAL SPECIFICATIONS		
DESCRIPTION	RESULT	TEST METHOD (STANDARD)
PEI Rating	4	C1027 Test
MOHS (Scratch Resistance)	7	MOHS Scale
Water Absorption	0.05%	C373 Test
C.O.F. (Wet)	0.63	ASTM C1028
Frost Resistance	RESISTANT	ASTM C1026
Thickness	8 mm	Factory Provided

G2 GREEN SQUARED
Certified by UL Environment