

Featuring GIO Eternal, Venatino Polished12x24 (Floor - Traffic, Light Grey Matte 24x24)


GIO
ARCHITECTURAL TILE + STONE

eternal (2020)

An exquisite range echoing the enduring, elegance of marble
for infinite design possibilities

INKJET RECTIFIED POLISHED & MATTE, FLOOR & WALL GLAZED PORCELAIN STONEWARE



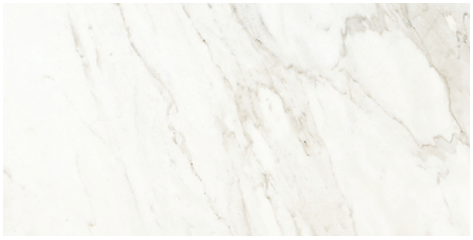

GIET1224VTH
12″ x 24″ Honed Field Tile
GIET1224VTS
12″ x 24″ Rectified Polished Field Tile



GIET1212VTH
12″ x 12″ Honed Field Tile
GIET1212VTS
12″ x 12″ Rectified Polished Field Tile

GIET312BNVT
3″ x 12″ Honed Bullnose
GIET312BNVTS
3″ x 12″ Polished Bullnose



GIET1212VTH
3″ x 6″ Honed Field Tile
GIET1212VTS
3″ x 6″ Rectified Polished Field Tile



GIETMOSVT
2″ x 2″ Honed Mosaic
GIETMOSVTS
2″ x 2″ Polished Mosaic

PACKAGING


NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
12″ x 24″ Field Tile	8	15.75	–	32	504	1789
12″ x 12″ Field Tile	10	9.79	–	60	588	693
3″ x 6″ Field Tile	–	7.91	–	–	–	–
3″ x 12″ Bullnose	15	–	14	–	–	–
2″ x 2″ Mosaic	5	4.89	19	–	–	–

TECHNICAL SPECIFICATIONS

DESCRIPTION	RESULT	TEST METHOD (STANDARD)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.05%	C373 Test
PEI - Polished	3	C1027 Test
PEI - Honed	5	C1027 Test
C.O.F. (Dynamic) - Polished	0.24	ANSI 137.1
C.O.F. (Dynamic) - Honed	0.45	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Breaking Strength	250 lbs.	ASTMC648
Thickness	8 mm	Factory Provided

SHADE VARIATION AND APPLICATIONS

V3



HEAVY VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop	•	•	•

G2 GREEN SQUARED
Certified by UL Environment