

PATIOS/GARDENS
gio_thick 1.0 can be laid directly over gravel or sand



TRIMS AND ACCESSORIES
gio_thick 1.0 offers copings /stair treads, coping corners, pool grids, pool grid corners, and grip stair treads



GRASS
gio_thick 1.0 can be laid directly over grass or turf



Featuring Gio_Thick 1.0 Ikon Grey, 16x32 Porcelain Paver (exterior), 8x32 (interior) - i/o

gio_thick 1.0

What's "in" for outside design—20mm porcelain pavers for direct installation over grass, sand, gravel, and standard substrates

20mm PORCELAIN STONEWARE PAVER SUITABLE FOR DIRECT LAYING OVER GRASS, SAND, GRAVEL, STANDARD MORTAR INSTALLATIONS, AND RAISED PEDESTAL APPLICATIONS.

limestone

BLUE STONE



GIGTCK2424BLS
24" x 24" Rectified Field
Tile/Porcelain Paver

BLUE STONE BLEND



GIGTCK2424BLBL
24" x 24" Rectified Field
Tile/Porcelain Paver

marble


WHITE i/o



GIGTCK2424MWHI
24" x 24" Rectified Field
Tile/Porcelain Paver


slate

CALIFORNIA GOLD i/o



GIGTCK2424CGD
24" x 24" Rectified Field
Tile/Porcelain Paver


MULTICOLOR DARK i/o



GIGTCK2424MTD
24" x 24" Rectified Field
Tile/Porcelain Paver

flagstone

NOCE



GIGTCK2424FLNO
24" x 24" Rectified Field
Tile/Porcelain Paver

TAN



GIGTCK2424FTAN
24" x 24" Rectified Field
Tile/Porcelain Paver


concrete

AREA GREY i/o



GIGTCK2424AGRY
24" x 24" Rectified Field
Tile/Porcelain Paver

AREA ANTHRACITE i/o



GIGTCK2424AANT
24" x 24" Rectified Field
Tile/Porcelain Paver

AREA BEIGE i/o



GIGTCK2424ABEG
24" x 24" Rectified Field
Tile/Porcelain Paver

AREA VANILLA i/o



GIGTCK2424AVAN
24" x 24" Rectified Field
Tile/Porcelain Paver

TECHNICAL SPECIFICATIONS


DESCRIPTION	RESULT	TEST METHOD (STANDARD)
PEI Rating	5	C1027 Test
Water Absorption	0.05%	C373 Test
C.O.F. (Dynamic)	0.42+	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	20 mm	NA

i/o - INSIDE AND OUTSIDE

GIO_THICK SERIES 1.0 SPECIAL ACCESSORIES




COPING/STAIR TREADS (rounded edge)



POOL GRID



GRIP STAIR TREAD



POOL GRID CORNERS




COPING/STAIR TREAD CORNERS



PEDESTAL SUPPORT

gio_thick 1.0 pedestal supports for raised laying. Multiple height options are available.

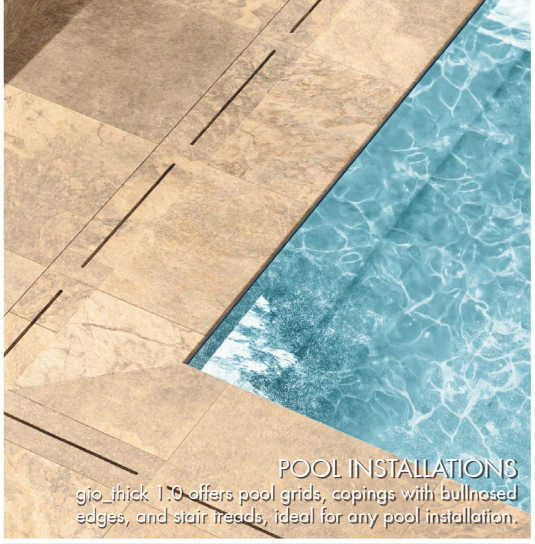

POOL INSTALLATIONS

gio_thick 1.0 offers pool grids, copings with bullnosed edges, and stair treads, ideal for any pool installation.



CARE AND MAINTENANCE

gio_thick 1.0 raised laying facilitates ease of care and maintenance for wiring and piping systems.

Featuring Gio_Thick 1.0 Quartz Silver 24x24 Rectified

gio_thick 1.0

gio_thick 1.0

What's "in" for outside design—20mm porcelain pavers for direct installation over grass, sand, gravel, and standard substrates

20mm PORCELAIN STONEWARE PAVER SUITABLE FOR DIRECT LAYING OVER GRASS, SAND, GRAVEL, STANDARD MORTAR INSTALLATIONS, AND RAISED PEDESTAL APPLICATIONS.

quartz

GOLD i/o



GIGTCK2424GLD
24" x 24" Rectified Field
Tile/Porcelain Paver


SILVER i/o



GIGTCK2424SVR
24" x 24" Rectified Field
Tile/Porcelain Paver


sandstone

GIALLO

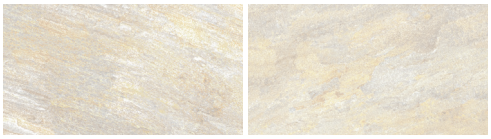

GIGTCK1836SGIA
18" x 36" Rectified Field
Tile/Porcelain Paver

SILVER

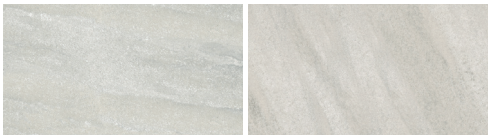

GIGTCK1836SSLV
18" x 36" Rectified Field
Tile/Porcelain Paver

wood

MILLWORKS SMOKE i/o



GIGTCK2424MISM
24" x 24" Rectified Field
Tile/Porcelain Paver

MILLWORKS WALNUT i/o



GIGTCK2424MIWA
24" x 24" Rectified Field
Tile/Porcelain Paver

WIREBRUSH GREY



GIGTCK1248WBGR
12" x 48" Rectified Field
Tile/Porcelain Paver

WIREBRUSH WALNUT



GIGTCK1248WBWA
12" x 48" Rectified Field
Tile/Porcelain Pavere

TECHNICAL SPECIFICATIONS


DESCRIPTION	RESULT	TEST METHOD (STANDARD)
PEI Rating	5	C1027 Test
Water Absorption	0.05%	C373 Test
C.O.F. (Dynamic)	0.42+	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	20 mm	NA

i/o - INSIDE AND OUTSIDE


GIO_THICK SERIES 1.0 SPECIAL ACCESSORIES




COPING/STAIR TREADS (rounded edge)



POOL GRID



GRIP STAIR TREAD



POOL GRID CORNERS



COPING/STAIR TREAD CORNERS