


Featuring GIO Terrazzo_Retro, Cotto 8" x 8" Rectified Field Tile


terrazzo_retro

blended stones of basalt, limestone & terrazzo in a porcelain palette
of contemporary color & traditional tiles with a twist

COLORED BODY RECTIFIED FLOOR & WALL GLAZED PORCELAIN STONEWARE


ANTHRACITE

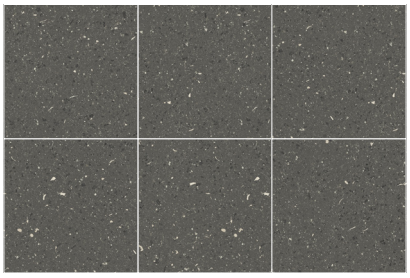




GIOTZR88BLK
8″x 8″
Rectified Field Tile


TAUPE

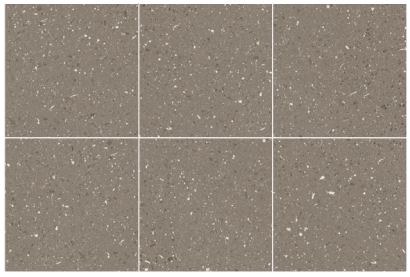




GIOTZR88TPE
8″x 8″
Rectified Field Tile


COTTO

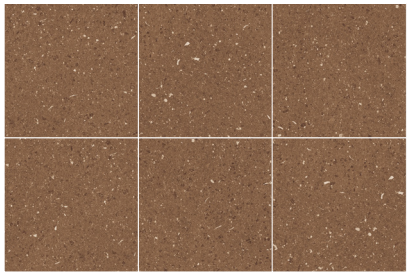



GIOTZR88COT
8″x 8″
Rectified Field Tile


PEARL

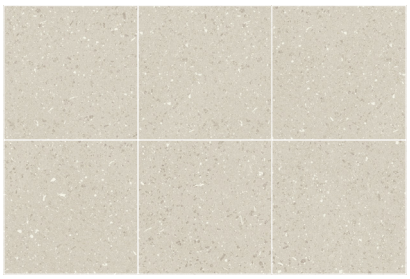



GIOTZR88PRL
8″x 8″
Rectified Field Tile


SAND

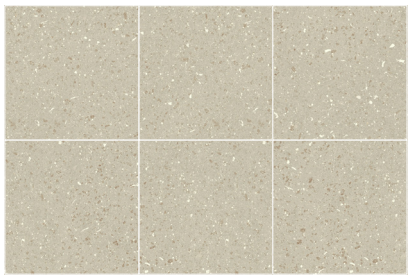




GIOTZR88SND
8″x 8″
Rectified Field Tile

GREY

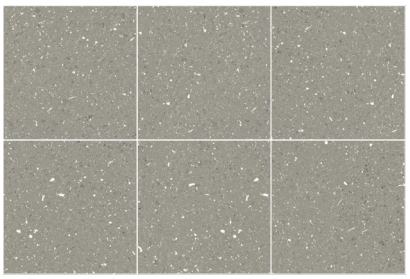



GIOTZR88GRY
8″x 8″
Rectified Field Tile

PEARL DECOR





GIOTZR88PRLDC
8″x 8″
Rectified Field Tile


SAND DECOR






GIOTZR88SNDDC
8″x 8″
Rectified Field Tile

GREY DECOR

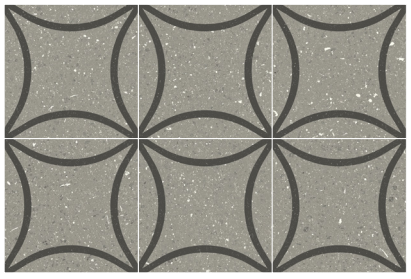




GIOTZR88GRYDC
8″x 8″
Rectified Decor Tile

PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
8″x 8″ Rectified Field Tile	30	12.91	52.80	56	722.96	2956.80
8″x 8″ Rectified Decor Tile	30	12.91	52.80	56	722.96	2956.80

SHADE VARIATION AND APPLICATIONS

V2



MODERATE VARIATION

	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
Floor	•	•	•
Wall	•	•	•
Countertop			

TECHNICAL SPECIFICATIONS

Description	Result	Test Method (Standard)
Chemical Resistance	RESISTANT	C650 Test
Water Absorption	0.05%	ISO 10545-3
PEI	4	C1027 Test
C.O.F. (Dynamic)	0.42	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Thickness	9 mm	Factory Provided